




## Sat-Light Series

### VSAT DC Block/Inserter | FOX-V-DCB/PN-DCI

#### Product Description

The Global Foxcom VSAT DC Block has been designed to block any incoming DC on an L band system and insert any DC voltage up to 48V @ 5A. The unit has negligible L-band through loss. DC is injected via the filtered soldered connector.

Other Connector configurations are available upon request.

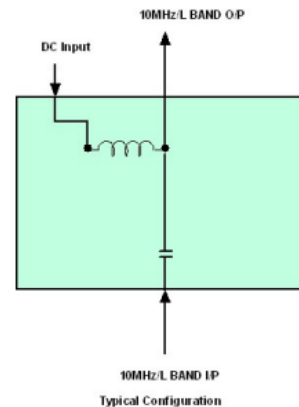


# Sat-Light Series

## Specifications

### VSAT DC Block/Inserter Specifications

Frequency range	950 - 2150MHz 10 MHz
Through Loss 10MHz	>1dB
L-Band Through Loss 950 –2150MHz	>1dB
DC Insertion	48V Max
DC Current	5A Max
Connectors	'N' type as standard 50 Ohm
Dimensions	56mm x 35mm x 25mm
Mounting Dimensions	47mm x 57mm (M3)
Weight	100 grams
RoSH/WEEE Compliant	YES

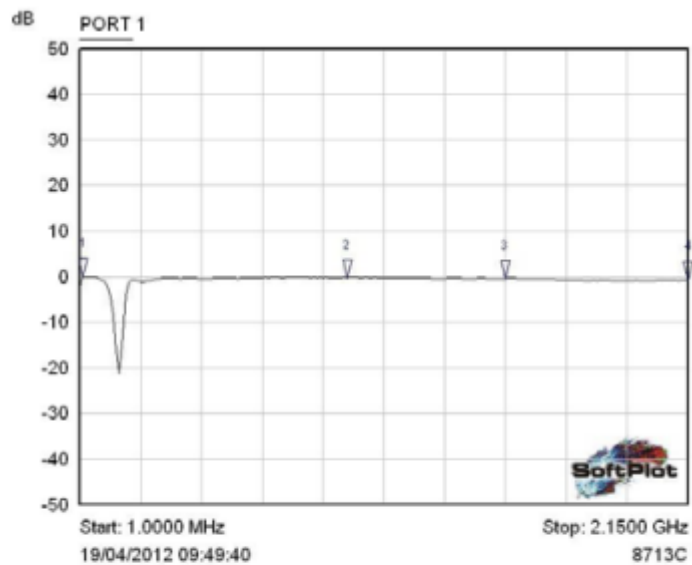

Mkr	Trace	X-Axis	Value	Notes
1	PORT 1	11.7450 MHz	-0.08 dB	10MHz Passing
2	PORT 1	946.5600 MHz	-0.27 dB	L Band Passing
3	PORT 1	1.5053 GHz	-0.44 dB	L Band Passing
4	PORT 1	2.1500 GHz	-0.66 dB	L Band Passing