




Sat-Light Series

VSAT Bi-AMP RX | FOX- V-BIAMPRX/PN-DCP

Product Description

The Global Foxcom VSAT BIAMPRX amplifies the L-Band signal from the LNB to the modem. Additionally the 10MHz Reference signal is also amplified if carried on the RX path. When ordering the customer should specify the level of amplification required on both L Band and 10MHz paths. Power for the unit is taken from the LNB supply voltage passing through.

Other connector configurations are available upon request.

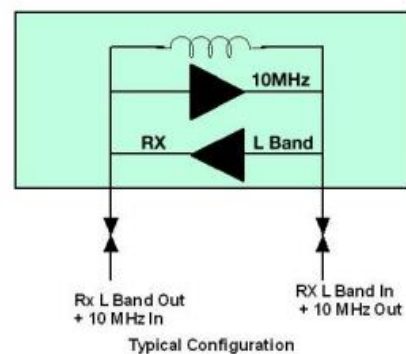

Specifications

L Band Frequency range	950–2150MHz
Gain at L Band 0dBm Input	0 to +14dBm Factory preset
Gain at 10MHz 0dBm Input	0 to +13dBm Factory preset
Connectors	N type as standard 50 Ohm
Max. DC Current Pass through	4 Amps
Current consumption	100mA
Max DC voltage Pass through	48V
Connectors	N-Type 50 Ohm Female
Dimensions	115mm x 67mm x 26mm
Mounting Dimensions	105mm x 57mm (M3)
Weight	250 grams