



GPS DC Block & Inserter


G-DCB/P*-DCI

Description

The Global Professional GPS DC Block & Inserter has been designed to block any incoming DC on the input and to insert any voltage upto 48V@ Max 5amp.


The unit has negligible through loss.

DC is injected via the filtered solder Connector.

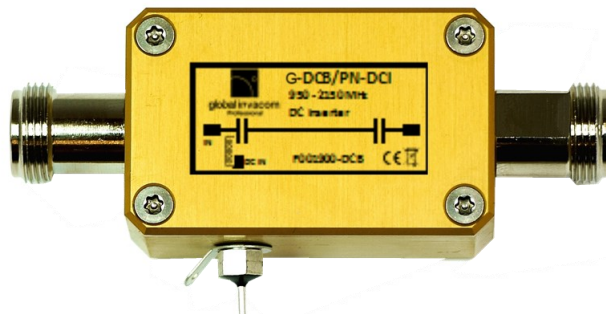

Specifications

Frequency Pass	950MHz - 2150MHz
Through Loss 950 –2150MHz	>1dB
DC Voltage Insertion	48V Max
DC Current	5A Max
Connector Options*	<ul style="list-style-type: none"> • ‘N’ Type 50 Ohm Female • ‘SMA’ 50 Ohm Female • ‘F’ 75 Ohm Female • ‘BNC’ 50 Ohm Female • ‘BNC’ 75 Ohm Female • ‘TNC’ 50 Ohm Female
Dimensions	56mm x 35mm x 26mm
Mounting Dimensions	47mm x 26mm
Weight	100 grams
RoSH/WEEE Compliant	YES

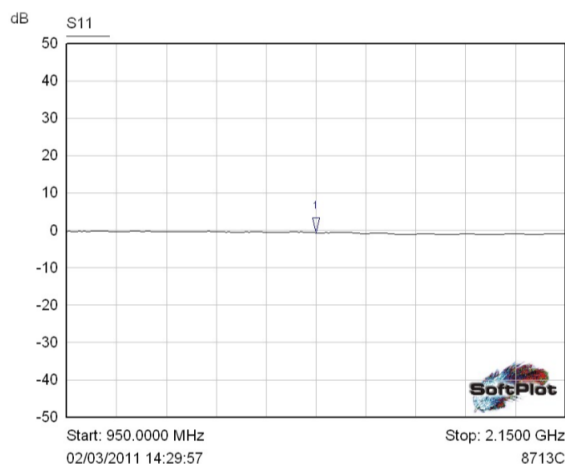

Mkr	Trace	X-Axis	Value	Notes
1	S11	1.5500 GHz	-0.59 dB	

